




Wen Li	Fang Yang	Jiang Yang	Fang Wang



Tolerance: 0.25(0.01)

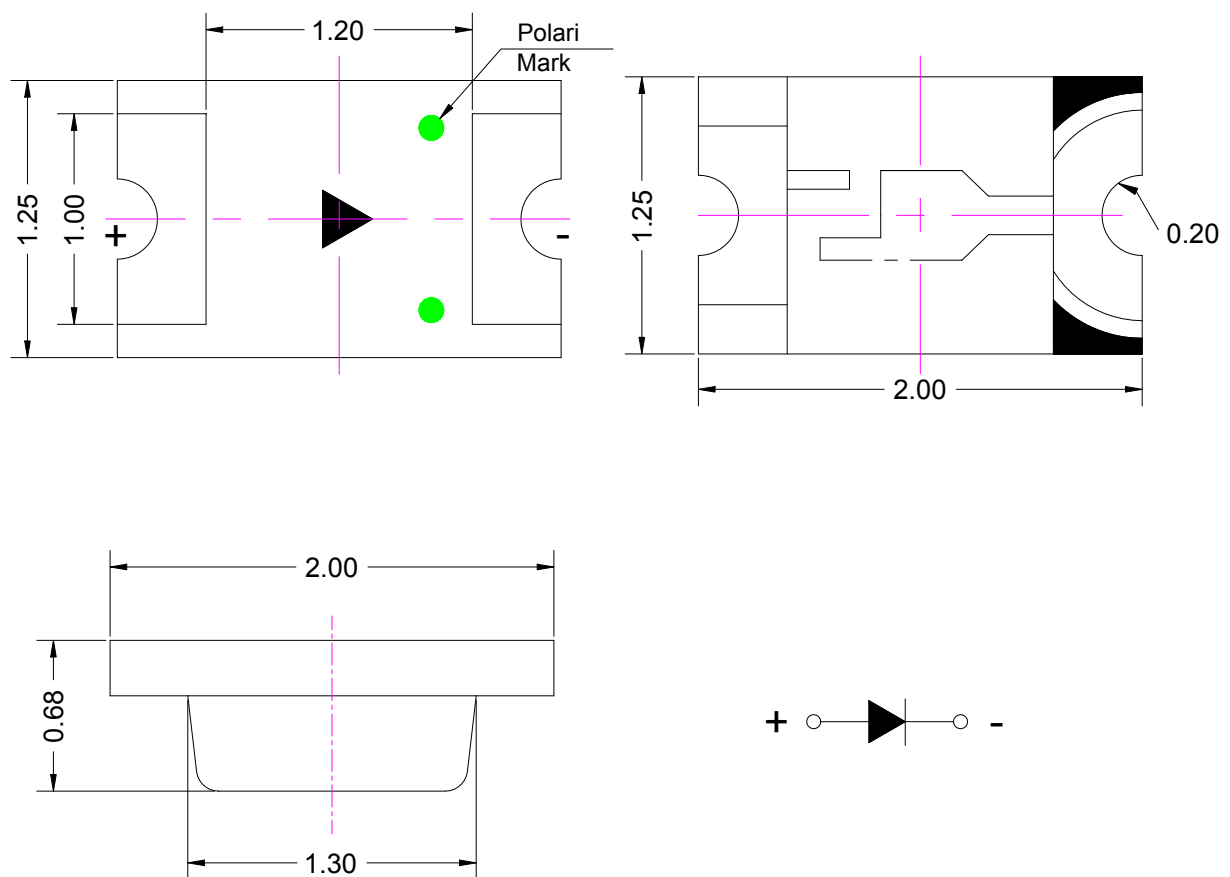

Unit: mm

Color: Pure White

Lens-color: Water clear

Emitting Material: InGaN

Drawing by: Polia ion



3 Characteristic

Forward current	If	30	mA			
Reverse voltage	Vr	5	V			
Power dissipation	Pd	110	mW			
Operating temperature range	Top	-25 +80	C			
Storage temperature range	Tg	-30 +80	C			
Peak pulsing current 1/8 d f=1KH	Ifp	125	mA			
Wavelength at peak emission	If=20mA	peak	5000	6000	6500	K
Spectral half bandwidth	If=20mA			10		
Forward voltage	If=20mA	Vf	3.0		3.6	V
Luminous intensity	If=20mA	I	400	430	460	mcd
Viewing angle at 50% IV	If=10mA		--	120	--	Deg
Reverse current	Vr=5V	Ir	--	--	5	A



00001000

41

ПК 00001000

1234567890


00001000

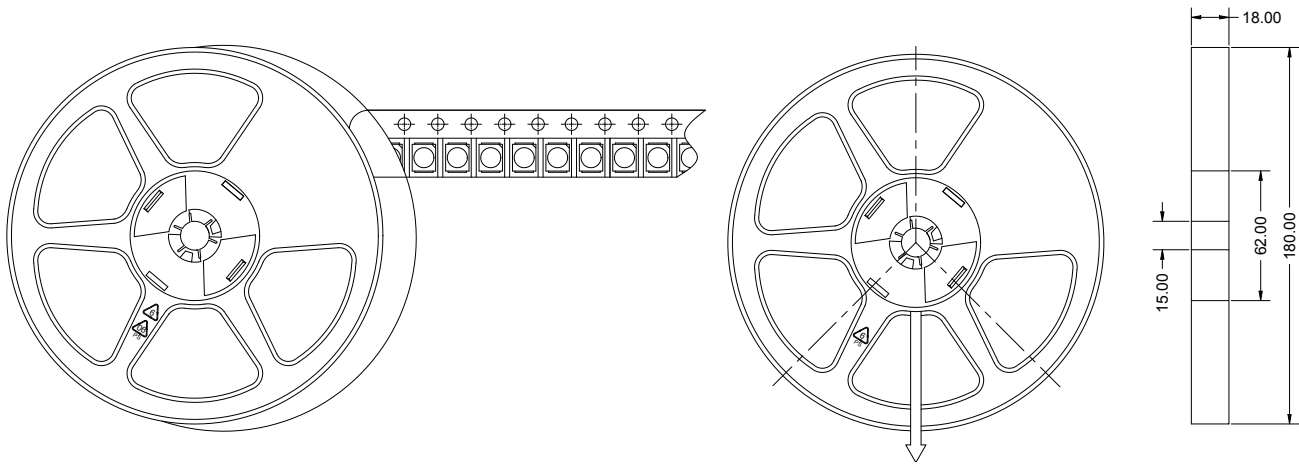


Diameter: 180.0mm
Width: 18mm
SMD0805R 4000pc /Reel
An i-S a ic Shielding
Black Reel



An i-S a ic Shielding
1 Reel / Bag (T=0.1mm)



10 Bag / 1 Inner Bo
SMD0805R
40,000pc /Inner Bo

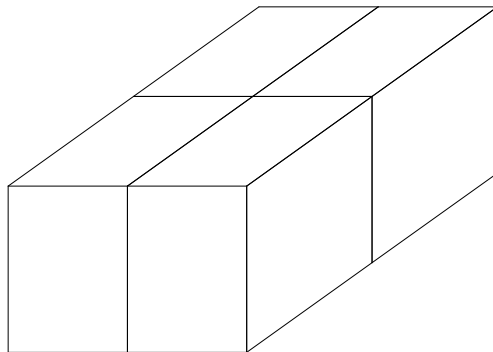

4 Inner Bo e / 1 Car on
SMD0805R --160,000 PCS / 1 Car on

